


SCALPEX NW

UNIVERSAL, GEL SUPER-STRIPPER FOR A VARIETY OF
PAINTS, VARNISHES, TAGS AND GLUES



PRODUCT BENEFITS

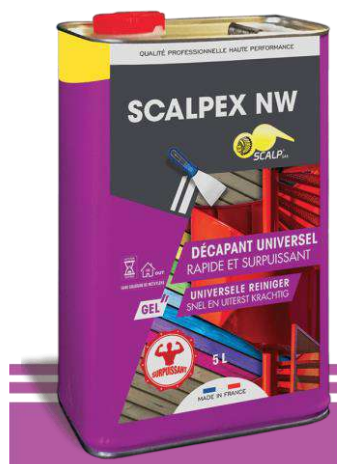

ALL
SURFACES

- Dry residue
- Fast
- Ideal for painters
- Does not run, reduced consumption
- Proven efficacy on all organic surfaces
- Ideal viscosity, suitable for vertical surfaces
- Ultra-fast action
- New generation product
- Does not require rinsing



PACKAGING :

- 20 L: 24 x 20 L pallet
- 5 L: 4 x 5 L pack
- 750 ml: 24 x 750 ml pack

AREAS OF APPLICATION

SCALPEX NW is designed for stripping stains, paints and varnishes from surfaces such as: wood, woodwork, iron, zinc, galvanised metal, stone and concrete.

APPLICATION

- 1. DILUTION :** Ready to use.
- 2. APPLICATION EQUIPMENT :** Natural fibre or graining brush..
- 3. METHOD :** Shake well before use, apply thickly, leave to work, then scrape off with a scraper or jack plane. Avoid applying to wet surfaces.
- 4. APPLICATION TIME :** : From 20 minutes, depending on climatic conditions and coating. Never allow product to dry.
- 5. APPLICATION TEMPERATURE :** From 5 to 50°C. Efficacy is reduced at extreme temperatures.
- 6. CLEANING OF TOOLS :** Tools must be cleaned with water as soon as possible after application.



SCALP is a French family-owned business and manufacturer of cleaning, protection and treatment solutions, with over 65 years as a construction-industry specialist.

7. APPLICATION RATE 300 - 600 ml/m² depending on the coating. *

8. STORAGE : Store the product in frost-free premises, away from the elements, incandescent light sources and direct sunlight.

* Coverage areas are provided for information only and can be used to assess a project. They are in no way contractual; only tests can define the actual amount of product required depending on the surface to be treated.

PHYSICOCHEMICAL PROPERTIES

- | | |
|---|------------------------|
| • Solvent-based product | • pH : >3 |
| • Colourless to slightly yellowish gel | • Frost-proof |
| • Density: 1.05 +/- 0.03 g /cm ³ | • Viscosity > 4000 cps |

APPLICATION PRECAUTIONS

1. PROTECTION OF SURFACES : Do not apply to PVC, rubber, plastic tiles or polystyrene

2. PROTECTION OF PERSONNEL: Avoid contact with eyes and skin. Wear safety goggles. In case of contact, immediately wash hands and eyes with water. Do not inhale vapours. Wear PVC or latex gloves of the following type: GOLDEX LATEX 3130 or PVC535K, or PVA or nitrile butyl rubber gloves. When using the product in an enclosed, non-ventilated area, a breathing apparatus, equipped with a Category-A vapour and gas filter, is recommended.

Important: The contents of this documentation result from our experience of the product. We cannot be held responsible for its use in each individual case. It is essential to test areas to be treated beforehand. See the Safety Data Sheet (SDS).



SCALP is a French family-owned business and manufacturer of cleaning, protection and treatment solutions, with over 65 years as a construction-industry specialist.

Technical Data Sheet • April 2021
Page 2/2